SuperFOIL®



3 IN 1 DESIGN

INSULATION, VAPOUR CONTROL LAYER & RADIANT BARRIER

EASY TO INSTALL

NO SPECIALIST TOOLS REQUIRED

IDEAL FOR USE IN


NEW BUILD, RETROFIT, TIMBER-FRAME, DIY

ACHIEVE BUILDING COMPLIANCE

MEET OR EXCEED PROJECT REQUIREMENTS

SUSTAINABLE

MADE FROM UP TO 40% RECYCLED MATERIALS

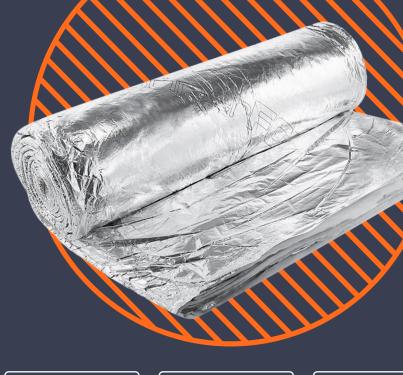







Change the way you insulate

Thermal Insulation For Use In Roofs, Walls & Floors

KEY FEATURES

- SF60 is from SuperFOIL's multifoil range, offering a 3 in 1 design high-performance insulation, vapour control layer and a radiant barrier in 1 product.
- SuperFOIL also acts as a radiant barrier to reflect excessive heat gain during the summer months as well as insulating throughout the year.
- SF60, like all our multifoil products, has undergone rigorous testing to ensure that they meet the latest building regulations standards.
- SuperFOIL's clever design allows easier fitting without any specialist tools and minimal wastage, unlike many traditional insulation types.
- SF60 can be installed in combination with other insulation types.
- SF60 is ideal for use in roofs, walls and floor structures in new builds & retrofits.
- SuperFOIL SF60 is made from up to 40% recycled materials and is fully recyclable at the end of its 50+ year lifespan.



Company Info (UK)

Boulder Developments Ltd, Boulder Business Park, Pioneer Way, Lincoln, LN6 0QR, England.





Boulder Developments Ltd, 1st, 2nd and 3rd Floor, Joop Geesinkweg 901 999, Amsterdam, 1114 AB, Netherlands



PRODUCT DIMENSIONS	
Thickness	100mm
Length (Various)	8m
Width (Various)	1.5m
Weight (Various)	17.75kg

THERMAL PERFORMANCE	
Core	3.58 R Value
Roof (inc. air spaces)	4.48 R Value
Wall (inc. air spaces)	4.91 R Value
Floor (inc. air spaces)	6.24 R Value
Emittance	0.05

FIRE PERFORMANCE

Reaction to Fire (Euroclass)

Class F

Sizes / Figures are approximate & Subject to change without notice, tolerance

SuperFOIL.co.uk





